



Outperform every day.™

Project:

Item Number:

Quantity:

INTERNATIONAL MIRAGE® STANDARD 1800 WATT COUNTERTOP INDUCTION RANGES



Mirage® Standard 1800 Watt Countertop Induction Range

DESCRIPTION

The ultra-low profile, portable countertop induction range is designed for use in light to medium-duty front-of-the-house cooking.

The case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction ranges are equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off
- Safety auto-shut-off function

Agency Listings



Due to continued product improvement, please consult www.vollrath.com for current product specifications.

MODELS

- 59650 Countertop Range – Schuko Plug
- 59651 Countertop Range – UK Plug
- 59652 Countertop Range – China Plug
- 59655 Countertop Range – AU Plug

FEATURES

- 100 power levels with optimum power output to a wide variety of induction-ready cookware
- 1-100 power levels or °F/°C temperature level controls
- 90% efficiency rating
- Easy to read digital readout for power level
- 1-180 minute timer
- Stainless steel case and ceramic top
- Patent-pending low profile design and complete portability
- Ranges display HOT when unit is turned off, if the cooking surface is still hot
- Variable speed knob for fast temperature adjustment
- Rubber feet to prevent slipping of appliance
- Unit comes complete with a 6-ft. (183 cm) cord with plug and does not require hard wiring
- Full one-year parts and labor warranty

IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- All models require unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals	Date

The Vollrath Company, L.L.C.
 Headquarters
 1236 North 18th Street
 Sheboygan, Wisconsin
 53081-3201 USA
 Tel: 920-457-4851
 Main Fax: 920-459-6573
www.vollrath.com

Vollrath Europe BV
 Beneluxbaan 7
 5121 AD RIJEN
 The Netherlands
 +31161870005




Vollrath of China
 Vollrath Shanghai Trading Limited
 29D, 855 South Pu Dong Road
 Shanghai, China 200120
 Tel: 86-21-50589580

Vollrath de Mexico S. de R.L. de C.V.
 Periferico Sur Edificio 2-C
 Col. Santa Maria Tequepexpan
 45601 Tlaquepaque, Jalisco Mexico
 Tel: (52) 333-133-6767
 Tel: (52) 333-133-6769
 Fax: (52) 333-133-6768

INTERNATIONAL MIRAGE® STANDARD 1800 WATT COUNTERTOP INDUCTION RANGES

DIMENSIONS

(Shown in inches (cm))

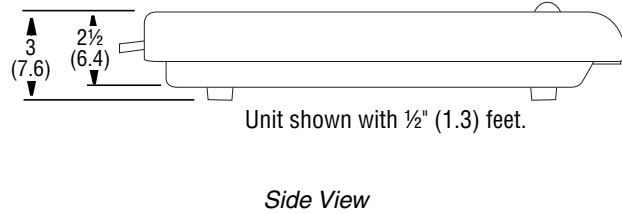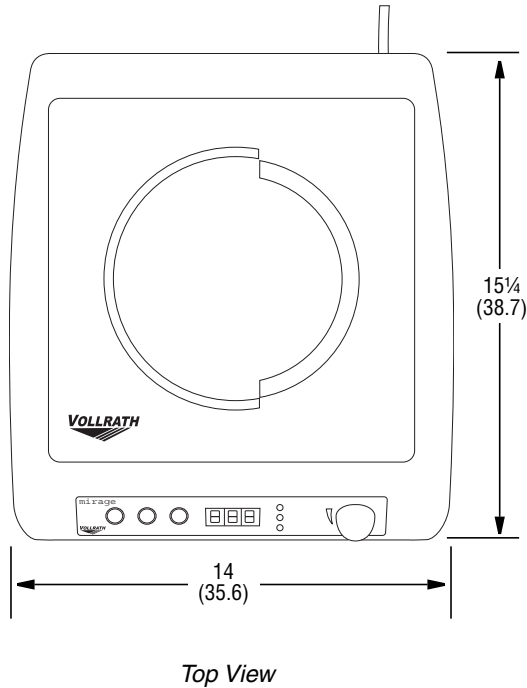


Unit shown with 1/2" (1.3) feet.

SPECIFICATIONS – 1 PHASE

Model	Max Pan Size	HZ	Watts	Voltage (AC)	Nominal Amps	Wall/Supply Side Plug	Weight Lb (Kg)	Shipping Weight Lb (Kg)	Shipping Container
59650	14 (35.6)	50/60	1800	230	7.8	Schuko	12.8 (5.8)	15.7 (7.1)	17 3/4 x 17 x 7 1/4 (45.1 x 43.2 x 18.4)
59651						UK			
59652						China			
59655						AU			

Receptacles

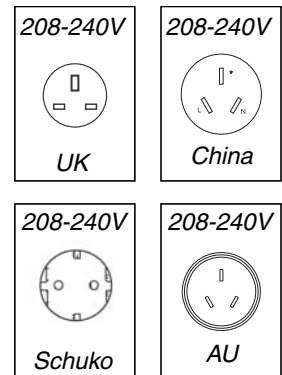

The Vollrath Company, L.L.C.
 Headquarters
 1236 North 18th Street
 Sheboygan, Wisconsin
 53081-3201 USA
 Tel: 920-457-4851
 Main Fax: 920-459-6573
www.vollrath.com

Vollrath Europe BV
 Beneluxbaan 7
 5121 AD RIJEN
 The Netherlands
 +31161870005

Vollrath of China
 Vollrath Shanghai Trading Limited
 29D, 855 South Pu Dong Road
 Shanghai, China 200120
 Tel: 86-21-50589580

Vollrath de Mexico S. de R.L. de C.V.
 Periferico Sur Edificio 2-C
 Col. Santa Maria Tequepexpan
 45601 Tlaquepaque, Jalisco Mexico
 Tel: (52) 333-133-6767
 Tel: (52) 333-133-6769
 Fax: (52) 333-133-6768