

TRUE FOOD SERVICE EQUIPMENT, INC.

2001 East Terra Lane • O'Fallon, Missouri 63366 (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name: _____ Location: _____

Item #: _____ Qty: ____

Model #:

SIS #

AIA #

Model: **TPP-44D-2** **Food Prep Table:** Drawered Pizza Prep Table



TPP-44D-2

- True's pizza prep tables are designed with enduring quality that protects your long term investment.
- Oversized, environmentally friendly (R134A) forced-air refrigeration system holds 33°F to 41°F (.5°C to 5°C).
- Complies with and listed under ANSI/NSF-7-1997-6.3.
- All stainless steel front, top and ends. Matching aluminum finished back.
- Stainless steel, patented, foam insulated flat lid keeps pan temperatures colder, locks in freshness, and minimizes condensation.
- Extra-deep 19¹/₂" (496 mm) full length removable cutting board included. Sanitary, high density, NSF approved white polyethylene provides tough preparation surface.
- Each drawer accommodates two Þ (2) full size 12"L x 20"W x 8"D (305 mm x 508 mm x 204 mm) pans (sold separately).
- Foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest ¹/₈" (millimeters rounded up to next whole number).

		Pans	Cabinet Dimensions (inches) (mm)						NEMA	Cord Length (total ft.)	Crated Weight (lbs.)
Model	Drawers	(top)	L**	D†	H*	HP	Voltage	Amps		(total m)	(kg)
TPP-44D-2	2	6	441⁄2	32¼	35¾	1⁄3	115/60/1	8.6	5-15P	9	370
			1131	820	909	1⁄3	230-240/50/1	4.2		2.74	168

* Length does not include¼" (7 mm) each side for cutting board brackets and thumb screws. Depth does not include 1" (26 mm) for rear bumpers and 3" (77 mm) for cutting board.
Height does not include 6¼" (159 mm) for castors or 6" (153 mm) for optional legs.

3	y

		APPROVALS:	AVAILABLE AT:
8/11	Printed in U.S.A.		

Model:

TPP-44D-2

Food Prep Table: Drawered Pizza Prep Table



STANDARD FEATURES

DESIGN

• True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Oversized, factory balanced refrigeration system with guided airflow to provide uniform temperature in food pan rail and cabinet interior.
- Forced-air design holds 33°F to 41°F (.5°C to 5°C) product temperature in food pans and cabinet interior. Complies with and listed under ANSI/ NSF-7-1997-6.3.
- Condensing unit accessed from behind front removable panel, slides out for easy maintenance.

CABINET CONSTRUCTION

- Exterior stainless steel front, top and ends. Matching aluminum finished back.
- Interior attractive, NSF approved, white aluminum liner. Stainless steel floor with coved corners
- Insulation entire cabinet structure and drawer facings are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter stem castors. 36" (915 mm) work surface height.

DRAWERS

Stainless steel exterior drawer facings and liners. Stainless steel drawer frames.

- Drawer fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Magnetic drawer gaskets of one piece construction, removable without tools for ease of cleaning.
- Heavy-duty stainless steel drawer slides and rollers. Removable without tools for easy cleaning.
- Each drawer accommodates two (2) full size 12"L x 20"W x 8"D (305 mm x 508 mm x 204 mm) food pans (sold separately). Drawer will support varying pan configurations with pan dividers bars (drawer pans and divider bars optional).

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Extra-deep 19¹/₂" (496 mm), full length removable cutting board included. Sanitary, high-density, NSF approved white polyethylene provides tough preparation surface.
- Stainless steel, patented, foam insulated flat lid keeps pan temperatures colder, locks in freshness, and minimizes condensation.
- Refrigerated pan rail comes standard with six (¹/₃size) 12³/₄"L x 6¹/₄"W x 6"D (324 mm x 159 mm x 153 mm) NSF approved clear polycarbonate insert pans.
- NSF-7 compliant for open food product.


ELECTRICAL

Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



- **OPTIONAL FEATURES/ACCESSORIES**
- Upcharge and lead times may apply.
- 230 240V / 50 Hz.
- □ 6" (153 mm) standard legs.
- □ 6" (153 mm) seismic/flanged legs. 4" (102 mm) diameter castors.
- 3" (85 mm) diameter castors.
- 2½" (64 mm) diameter castors.
- Garnish rack.
- □ Single overshelf.
- Double overshelf.
- □ 19½" (496 mm) deep, ¾" (19 mm) thick, white polyethylene cutting board.
- 19½" (496 mm) deep,½" (13 mm) thick, composite cutting board.
- Pan dividers.
- Exterior round digital temperature display (factory installed).
- Remote cabinets (condensing unit supplied by others: system comes standard with 404A expansion valve and requires R404A refrigerant). Consult factory technical service department for BTU information. All remote units must be hard wired during installation.



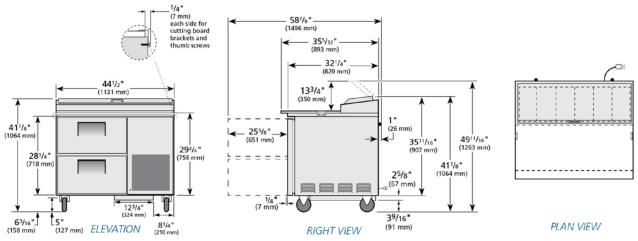

WARRANTY	METRIC DIMENSIONS ROUNDED UP TO THE						
One year warranty on all parts	NEAREST WHOLE MILLIMETER	Model	Elevation	Right	Plan	3D	Back
and labor and an additional 4 year warranty on compressor.	SPECIFICATIONS SUBJECT TO CHANGE	TPP-44D-2	TFQY70E	TFQY70S	TFQY70P	TFQY703	
(U.S.A. only)	WITHOUT NOTICE	•					

TRUE FOOD SERVICE EQUIPMENT

2001 East Terra Lane • O'Fallon, Missouri 63366 • (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com